


# Sinercom s.r.l.



## Dettagli prodotti

CODICE REFERENCE RÉFÉRENCE	kvar	V	A	SEZ. CAVI/COLLEGAMENTO CONNECTING CABLE SECT. SECTION CABLES DE CONNEXION	DIMENSIONI DIMENSIONS DIMENSIONS		
				mm <sup>2</sup>	L (mm)	P (mm)	H (mm)
RGT.4020	20	400	28.9	10	380	380	530
RGT.4025	25	400	36.1	25	380	380	530
RGT.4030	30	400	43.3	35	380	380	530
RGT.4035	35	400	50.5	35	380	380	530
RGT.4040	40	400	57.7	35	380	380	530
RGT.4050	50	400	72.2	50	380	380	530
RGT.4060	60	400	86.6	50	380	380	530
RGT.4070	70	400	101.0	70	380	380	530
RGT.4080	80	400	115.5	95	695	380	530
RGT.4090	90	400	129.9	95	695	380	530
RGT.4100	100	400	144.3	120	695	380	530
RGT.4125	125	400	180.4	95	695	380	530

# Sinercom s.r.l.

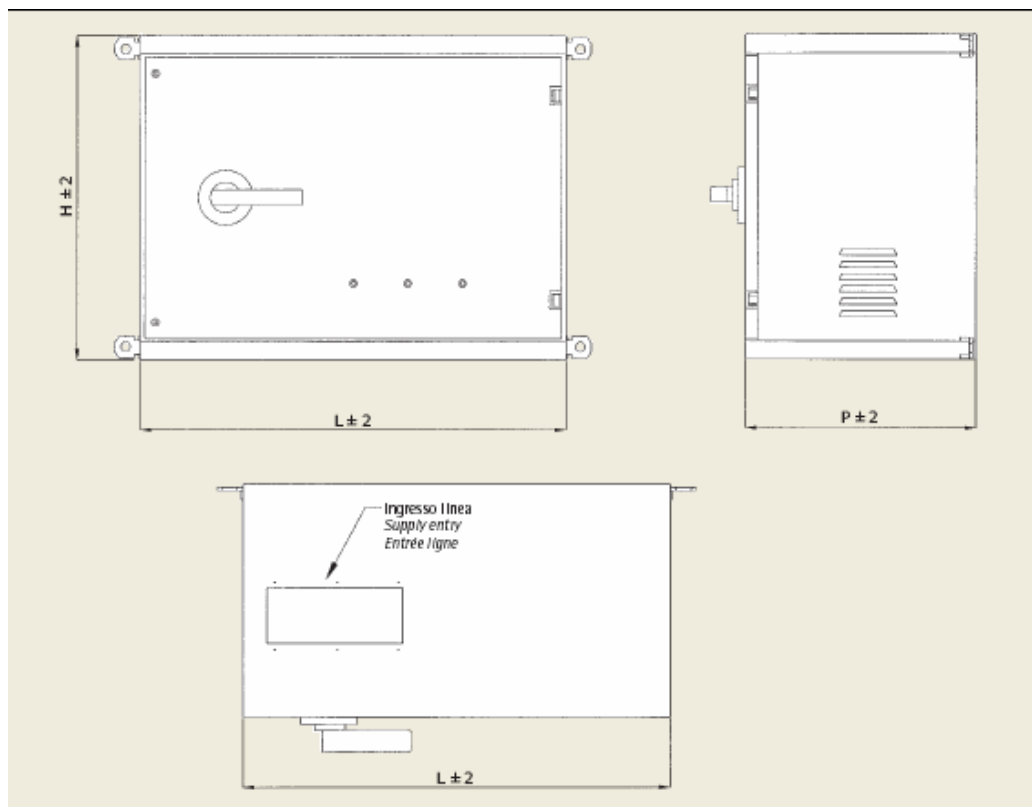

## Caratteristiche tecniche

Tensione nominale (Un)	Rated voltage (Un)	Tension nominale (Un)	400V		
Frequenza nominale	Rated frequency	Fréquence nominale	50 Hz (60 Hz a richiesta)	50 Hz (60 Hz on request)	50 Hz (60 Hz sur demande)
Tolleranza sulla capacità	Tolerance on capacitance	Tolérance sur la capacité	- 5% + 10%		
Temperatura di lavoro	Operating temperature	Température de fonctionnement	- 25°C / + 50° C		
Installazione delle unità capacitive	Installation of the capacitive units	Installation des unités capacitives	Verticale	Vertical	Verticale
Ingresso alimentazione	Power supply entry	Passage d'alimentation	Dall'alto	From the top	Par le haut
Servizio	Service	Service	Continuo	Continuous	Continu
Installazione	Installation	Installation	Per interno a parete, in ambiente non polveroso	For wall-mounting indoors, in dust-free environments	Pour intérieur, installation murale, en environnement non poussiéreux
Ventilazione	Ventilation	Ventilation	Naturale. L'aria deve poter circolare liberamente attraverso le alettature di ventilazione	Natural. Air must be able to circulate freely through the ventilation fins	Naturel. L'air doit pouvoir circuler librement à travers les ailettes de ventilation
Grado di protezione quadro chiuso	Degree of protection cabinet closed	Degré de protection armoire fermée	(IP40)/IP54 a richiesta	IP 30 (IP40)/IP54 on request	(IP40)/IP54 sur demande
Grado di protezione quadro aperto	Degree of protection cabinet open	Degré de protection armoire ouverte	(IP20 a richiesta)	IP 00 (IP20 on request)	(IP20 sur demande)
Norme di riferimento apparecchiature	Reference standards equipment	Normes de référence appareillages	CEI EN 60439-1, IEC 439-1 per quanto applicabile as far as applicable pour ce qui est applicable		
Norme di riferimento condensatori	Reference standards capacitors	Normes de référence condensateurs	CEI EN 60831-1/2, IEC 831-1/2		