

SKB Lead Acid Battery SK12-33(6FM33) 12V – 33Ah SINERCOM SRL

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.



BATTERY CONSTRUCTION

Component	Positive plate	Negative plate	Container	Cover	Safety Valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

GENERAL FEATURES

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

DIMENSIONS AND WEIGHT

Length (mm / inch).....195 / 7.68
 Width (mm / inch)..... 130 / 5.12
 Height (mm / inch).....155 / 6.10
 Total Height (mm / inch).....168 / 6.61
 Approx Weight (Kg / lbs)..... 10.2 / 22.5

Terminal Type : F11 (Vite Inser. M6)

PERFORMANCE CHARACTERISTICS

NOMINAL VOLTAGE.....12V
NUMBER OF CELL.....6
DESIGNE LIFE.....10 years

NOMINAL CAPACITY (25°C)

- 24 hour rate (1.51A - 10.8V).....36.2Ah
 - 10 hour rate (3.30A - 10.8V)..... 33.0Ah
 - 5 hour rate (5.58A - 10.5V)..... 27.9Ah
 - 1 hour rate (22.3A - 9.6V)..... 22.3Ah

INTERNAL RESISTANCE :

Fully Charged battery (25°C).....10.0 mOhms

SELF – DISCHARGE :

3% of capacity declined per month at 20°C (average)

OPERATING TEMPERATURE RANGE :

Discharge..... -20 – 60°C
 Charge..... -10 – 60°C
 Storage..... -20 – 60°C

MAX DISCHARGE CURRENT 77°F(25°C) :.....850A (5s)

CHARGE METHODS: Constant Voltage Charge 77°C (25°C)

Cycle use..... 14,4 – 14,7V


Maximum charging current.....10 A

Temperature compensation..... -30mV/°C

Standby use..... 13,6 – 13,8V

Temperature compensation..... -20mV/°C

BATTERY AND TERMINAL DIMENSIONS

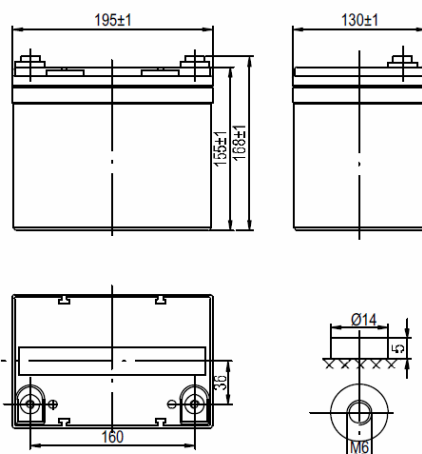

DISCHARGE CONSTANT CURRENT (Ampere at 77°F 25°C)

TIME	5 min.	10 min.	15 min.	30 min.	60 min.	2 h	3 h	4 h	5 h	8 h	10h	24 h
1.60 V	115	80.2	61.5	37.0	22.3	12.4	9.08	7.34	6.30	4.10	3.36	1.54
1.65 V	106	77.3	59.4	36.3	21.9	12.2	8.97	7.27	6.25	4.08	3.35	1.53
1.70 V	99.0	73.0	54.5	33.2	21.2	11.6	8.45	7.01	6.15	4.03	3.32	1.52
1.75 V	87.8	69.0	52.0	32.8	20.3	11.3	8.25	6.58	5.58	3.80	3.31	1.52
1.80 V	79.5	60.0	49.5	31.9	19.8	11.1	8.18	6.51	5.50	3.70	3.30	1.51

DISCHARGE CONSTANT POWER (Watts/cell at 77°F 25°C)

TIME	5 min.	10 min.	15 min.	30 min.	60 min.	2 h	3 h	4 h	5 h	8 h	10h	24 h
1.60 V	215	150	117	72.4	40.9	23.3	17.4	14.2	12.2	8.02	6.63	3.04
1.65 V	207	145	110	69.3	40.5	23.1	17.3	13.9	11.9	7.83	6.47	2.96
1.70 V	185	136	107	64.5	39.9	22.6	16.8	13.5	11.5	7.60	6.31	2.89
1.75 V	170	132	103	62.7	39.1	21.8	16.0	13.1	11.3	7.47	6.20	2.84
1.80 V	155	116	97.9	61.0	38.3	21.0	15.2	12.6	11.0	7.28	6.03	2.76

Sinercom srl - Via A. Dudan, 9 - 00143 Roma

Tel. 06-79.800.323 Fax 06-79.814.644

info@sinercom.it www.sinercom.it

SKB Lead Acid Battery SK12-33(6FM33) 12V – 33Ah SINERCOM SRL

